(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 30 October 2003 (30.10.2003)

PCT

(10) International Publication Number WO 03/089332 A1

(51) International Patent Classification7:

B65D 83/00

(21) International Application Number:

PCT/IT03/00235

(22) International Filing Date: 15 April 2003 (15.04.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: MI2002A 000839

19 April 2002 (19.04.2002)

(71) Applicant (for all designated States except US): IDEAL-PACK S.R.L. [TT/TT]; Strada Savonesa 9, I-15050 Rivalta Scrivia (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): (CANEGALLO, Pierottavio [IT/IT]; Via Fornaci 5, I-15057 Tortona (IT).

(74) Agent: INCOLLINGO ITALO; Piazzale Lavater 3, I-20129 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

Declaration under Rule 4.17:


of inventorship (Rule 4.17(iv)) for US only

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM FOR THE EXTRACTION OF LIQUIDS AND CREAMS WITH A REGULAR AND CONTINUOUS FLOW

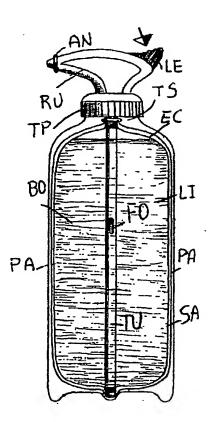

(57) Abstract: The system for extracting, dosing, dispensing, with controllable regular and continuous flows, liquids and creams from their container, in the absence of gas, comprises a thick hollow rod provided with low-softening means to seal a thermoplastic sac on which is shod an elastomeric balloon.